



Barrera ALT - 1000




Functions



Options



Features

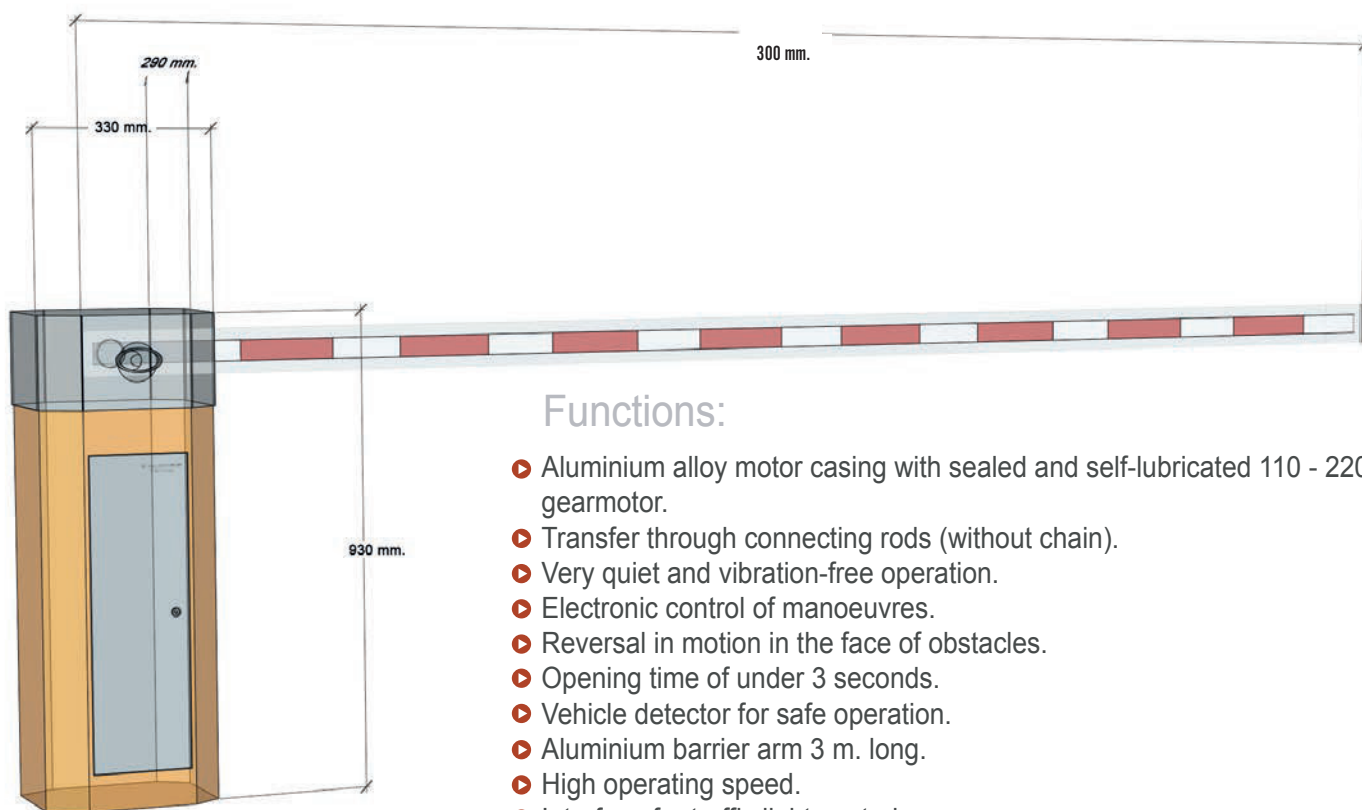

Functions:

- Aluminium alloy motor casing with sealed and self-lubricated 110 - 220 V gearmotor.
- Transfer through connecting rods (without chain).
- Very quiet and vibration-free operation.
- Electronic control of manoeuvres.
- Reversal in motion in the face of obstacles.
- Opening time of under 3 seconds.
- Vehicle detector for safe operation.
- Aluminium barrier arm 3 m. long.
- High operating speed.
- Interface for traffic light control.
- Manual opening possible in case of power failure.
- Made to withstand harsh environments.
- Outdoor operation.

The images that are attached in this offer are representative of the products.



It may vary depending on the configuration required by the client.



Options (not included):



- Red LED light strip on straight barrier arm.
- Articulated arm.
- Remote opening and closing control.
- Straight arm up to 4 metres long.



Physical features:

- Width: 330 mm.
- Depth: 290 mm.
- Height: 930 mm.
- Weight: 60 Kg.
- Power supply 220 VAC. 110 – 220 VAC. 50 - 60 hz.
- 2 A consumption.
- Complies with IP-44 standards.

Working temperature: from -20° to + 75°C

